

RECESSED LED STRIP V056-LED-STRIP

Application Features

For retail and hospitality applications.

Construction


Powder coated recessed linear strip light and an acrylic diffuser lens

Finish

- Powder coated gloss white

Electrical

- LED Strip lighting in choice of 2700K, 3000K, 3600K or 4000K
- Non-dimmable or 0-10V dimmable
- 15 feet of electrical cord whip

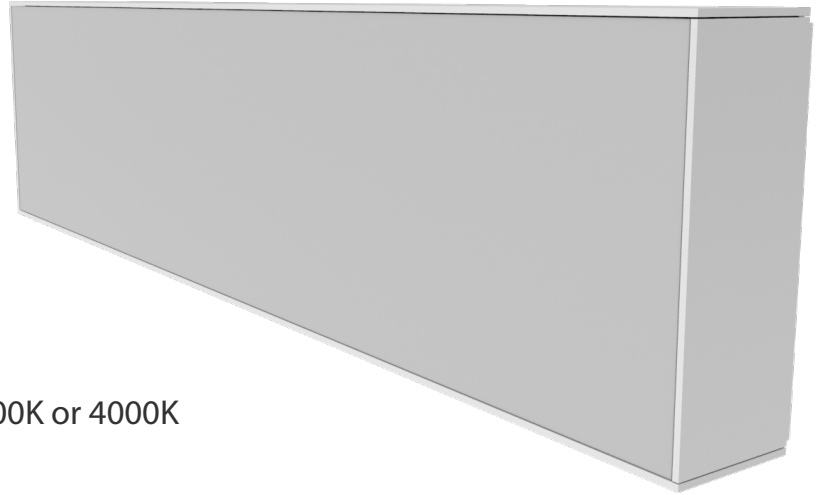

Mounting

- Fixture attaches to a standard J-Box (J-Box Not Supplied) and surrounding structure

Approvals

UL Listed

JOB NAME

V056-LED-STRIP-

Fixture Length

- Specify between 10 inch minimum and 92 inch maximum length

* Depth of channel is fixed at 1.25"

Fixture Width

- Specify between 4 inch minimum and 24 inch maximum height


Color Temperature

- 27 2700K
- 30 3000K
- 36 3600K
- 40 4000K

Dimming

- NON DIMMING
- 010V 0-10V DIMMING

RECESSED LED STRIP V056-LED-STRIP

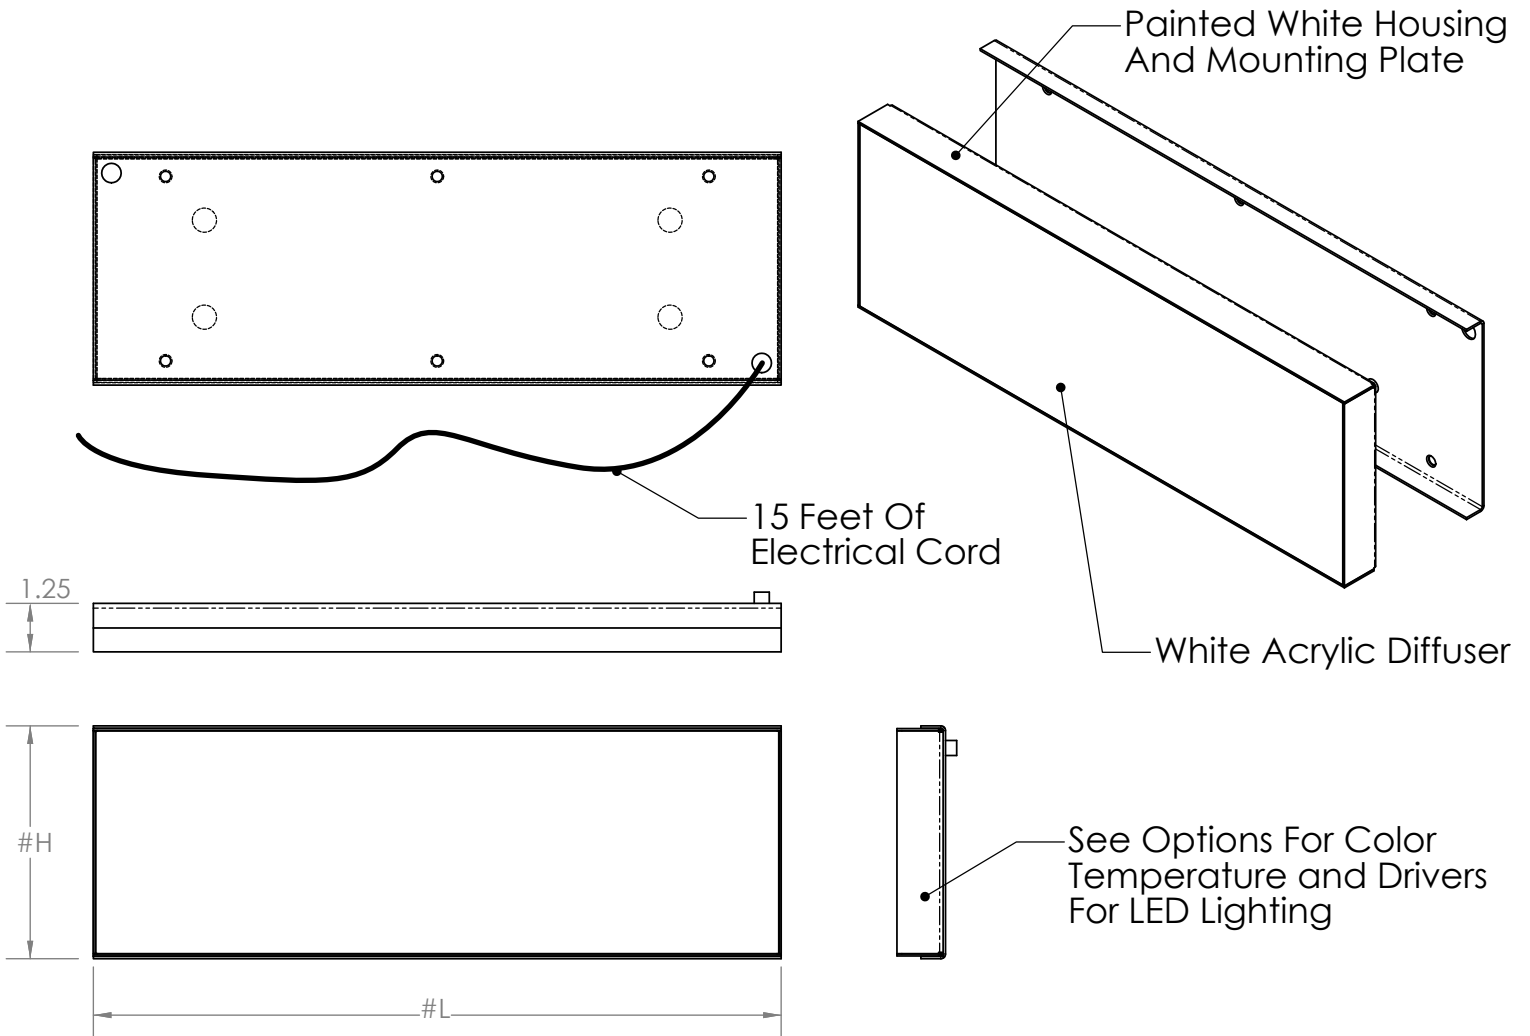

Fixture specifications

V056-LED-STRIP-#L-#H-CCT Recessed LED Strip	
Specification	Details
Voltage	120V AC 60 HZ
Wattage	Dependant on Dimensions
Approval	UL Listed Components
Diffuser Material	2447 White Acrylic
Lamp Type	LED Strip Lighting
Fixture Weight	7 lbs. Min.
Fixture Dimensions	10"- 92" x 4"- 24" x 1.25"

- Fixture is packed one per cardboard box
- Fixture to be installed by other contractor