

SOLITAIRE PENDANT V056-SOLITAIRE-PEND

Application Features

For retail, hospitality and residential applications.

Construction

Simplistic decorative pendant with a solid stem construction, decorative milled socket and accompanying hangstraight. Fixture will have a coupling for lengths over 72 inches.

Finish

- Choice of plated polished nickel, brushed nickel, polished brass or brushed brass
- Specify other finish

Electrical

- 1 x E26 Medium Base Socket (Lamps Not Included)

Mounting

- Fixture attaches to standard junction box (J-Boxes supplied by others)

Approvals

UL Listed

JOB NAME V056-SOLITAIRE-PEND-

O PN POLISHED NICKEL
O BN BRUSHED NICKEL
O PB POLISHED BRASS O PB POLISHED BRASS


OT Specify Other Option

O 6" To 96" Maximum

BB BRUSHED BRASS



SOLITAIRE PENDANT V056-SOLITAIRE-PEND

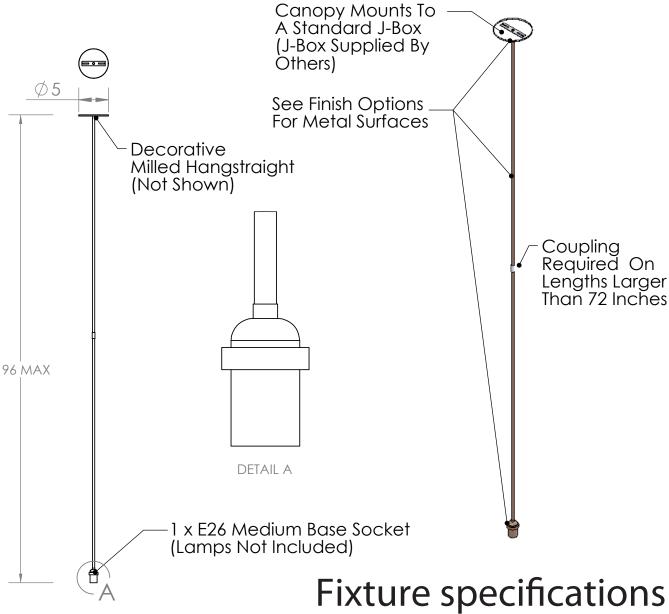

V056-SOLITAIRE-FSH-X Solitaire Pendant
Specification Details

Specification	Details
Voltage	120V AC 60 HZ
Wattage	1 x 100W Maximum
Approval	UL Listed
Lamp Type (Lamp not Included)	1 x Medium Base Lamp
Fixture Weight	1-15 lbs.
Fixture Dimensions	5" OD x 96" Max.

- Fixture is packed one per cardboard box
- Fixture to be installed by other contractor