



LINEAR WAVE PENDANT V056-WAVE-PEND

Application Features

For retail and hospitality applications.

Construction

Powder coated frame work with white polycarbonate wave diffuser lense

Finish

- Choice of silver, white or black powder paint

Electrical


- 3 x 54W F54T5HO Fluorescent Socket Sets (Lamps Not Included)
- 0-10V dimmable ballast

Mounting

- Fixture attaches to ceiling via four canopy locations
- 2 standard J-Boxes required for power source (J-Boxes supplied by others)

Approvals

UL Listed

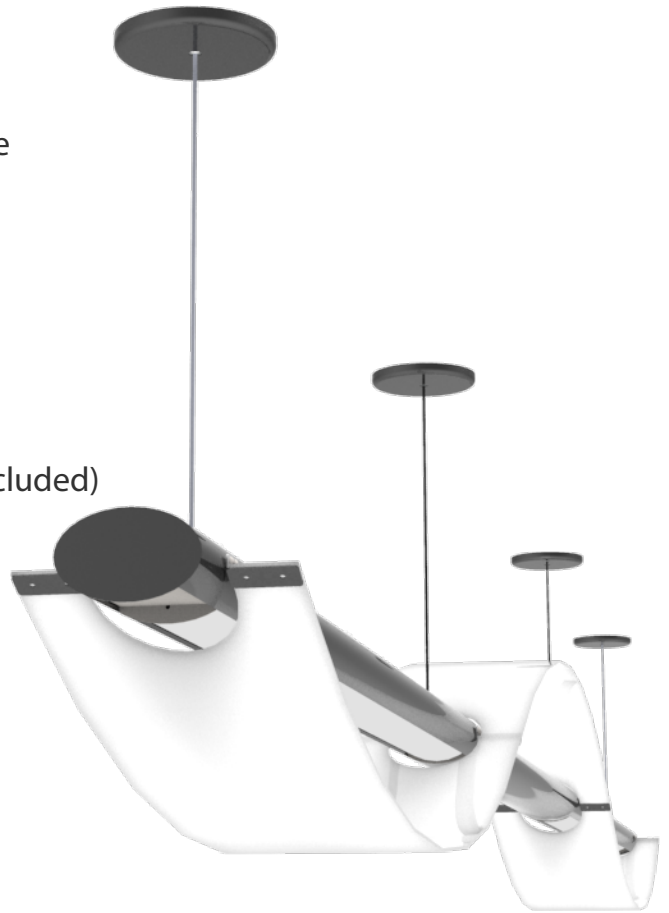


JOB NAME

V056-WAVE-PEND- 152 - 8 - 13 -

Fixture Length	● 152 152" Long	Fixture Width	● 8 8" Wide	Fixture Height	● 13 12.5" High	Fixture Height	○ BK BLACK ○ WH WHITE ○ SV SILVER
----------------	--------------------	---------------	----------------	----------------	--------------------	----------------	-----------------------------------------

LINEAR WAVE PENDANT V056-WAVE-PEND

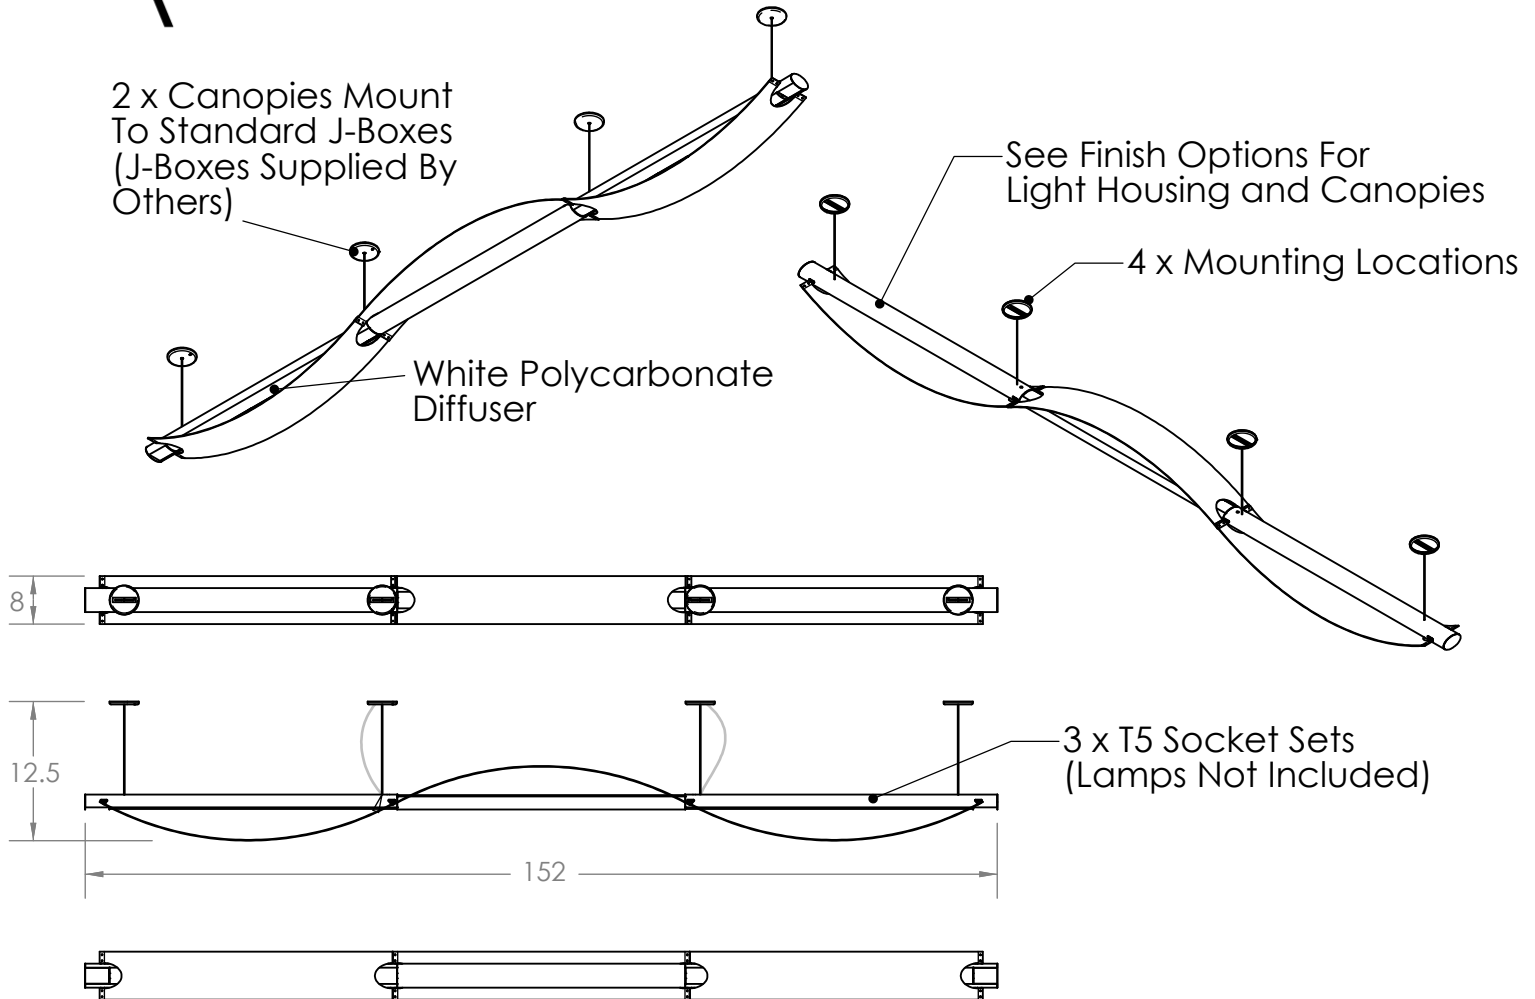

Fixture specifications

V056-WAVE-PEND-152-8-13-FSH Linear Wave Pendant	
Specification	Details
Voltage	120V AC 60 HZ
Wattage	3 x 54W Maximum
Dimming	0-10V
Approval	UL Listed
Diffuser Material	Polycarbonate
Lamp Type (Lamp not Included)	3 x F54T5HO Lamps
Fixture Weight	100 lbs.
Fixture Dimensions	152" x 8" x 12.5" Max

- Fixture is packed one per cardboard box
- Fixture to be installed by other contractor