



MONUMENT PENDANT V056-MNT-PEND

Application Features

For retail, hospitality and residential applications.

Construction

Pendant system composed of individual tubular fixture modules. Each pendant has a bottom and top cap in a powderpainted finish with white acrylic diffuser. Fixtures can be bundled onto canopy and hung at different heights.

Finish

- Choice of white or silver powder coat
- Specify other powder coat
- Specify other finish

Electrical


- 6 x F28T5 Socket Sets (Lamps Not Included)
- 8 feet of electrical cord supplied per pendant

Mounting

- Fixture attaches to standard junction box (J-Boxes supplied by others)

Approvals

UL Listed

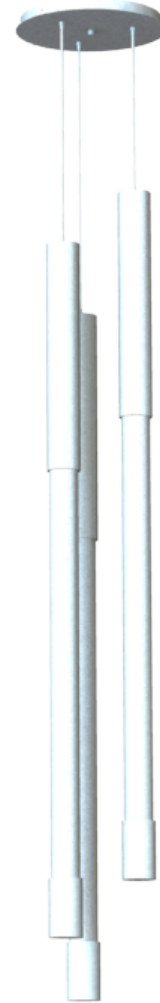


JOB NAME

V056-MNT-PEND-

| | | | | |
|---|--|---|---|---|
| <p>Finish Type</p> <p><input type="radio"/> WH WHITE</p> <p><input type="radio"/> SV SILVER</p> <p><input type="radio"/> OP Other Powder Paint Color</p> <p><input type="radio"/> OT Specify Other Option</p> | <p>Color Temperature</p> <p><input type="radio"/> 27 2700K</p> <p><input type="radio"/> 30 3000K</p> <p><input type="radio"/> 36 3600K</p> <p><input type="radio"/> 40 4000K</p> | <p>Dimming Option</p> <p><input type="radio"/> NO NONE</p> <p><input type="radio"/> 010 0-10V</p> <p><input type="radio"/> OT Specify Other</p> | <p>Voltage</p> <p><input type="radio"/> 120 120V</p> <p><input type="radio"/> 277 277V</p> <p><input type="radio"/> UNV Universal 120-277 Voltage</p> | <p>Pendant Quantity</p> <p><input type="radio"/> Specify Quantity Of Pendants</p> |
|---|--|---|---|---|

MONUMENT PENDANT V056-MNT-PEND

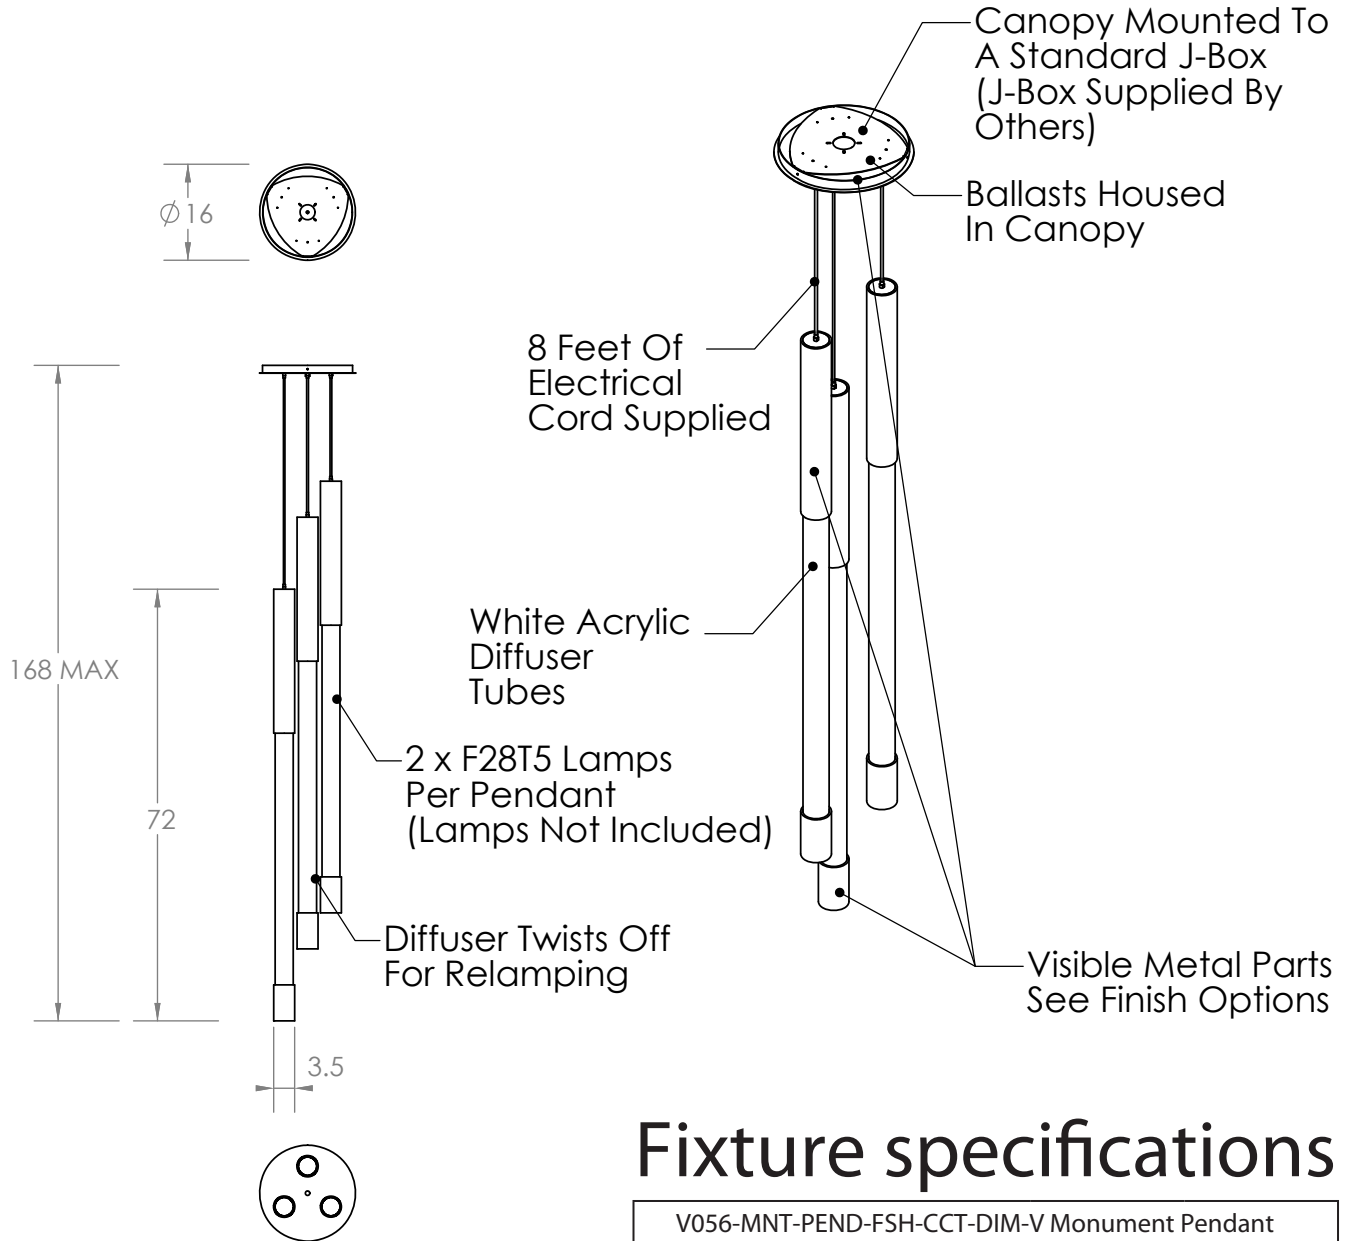

Fixture specifications

| V056-MNT-PEND-FSH-CCT-DIM-V Monument Pendant | |
|--|--------------------|
| Specification | Details |
| Voltage | 120V AC 60 HZ |
| Wattage | 6 x 28W Maximum |
| Approval | UL Listed |
| Diffuser Material | 2447 White Acrylic |
| Lamp Type (Lamp not Included) | 6 x F28T5 Lamps |
| Fixture Weight | 40 lbs. |
| Fixture Dimensions | 16" OD x 168" Max. |

- Fixture is packed one per cardboard box
- Fixture to be installed by other contractor